


INSTALLATION INSTRUCTION  
TOYOTA LC 76NS Roof Platform

丰田LC 76  
TOYOTA LC 76




01.

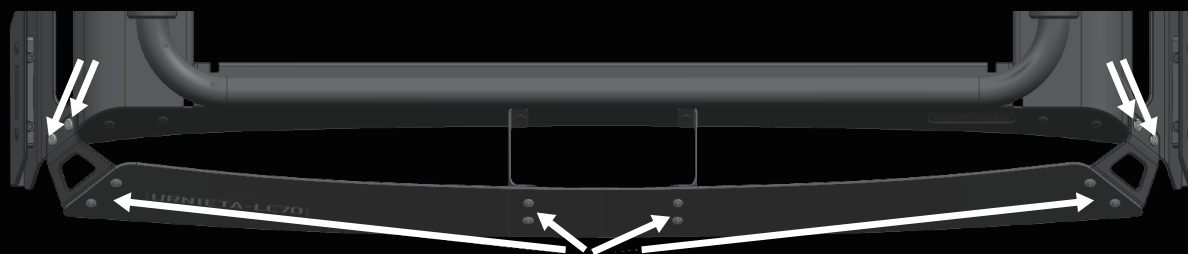


组装扰流板与扰流板支架（注意：中间使用对应的马车螺丝与垫片方头螺母固定，两侧使用M6斜平头螺丝固定）  
ASSEMBLE THE SPOILER AND SPOILER BRACKET (NOTE: USE THE CORRESPONDING CARRIAGE SCREWS AND GASKET SQUARE HEAD NUTS TO FIX IN THE MIDDLE, AND USE M6 OBLIQUE FLAT HEAD SCREWS TO FIX ON BOTH SIDES)

02.

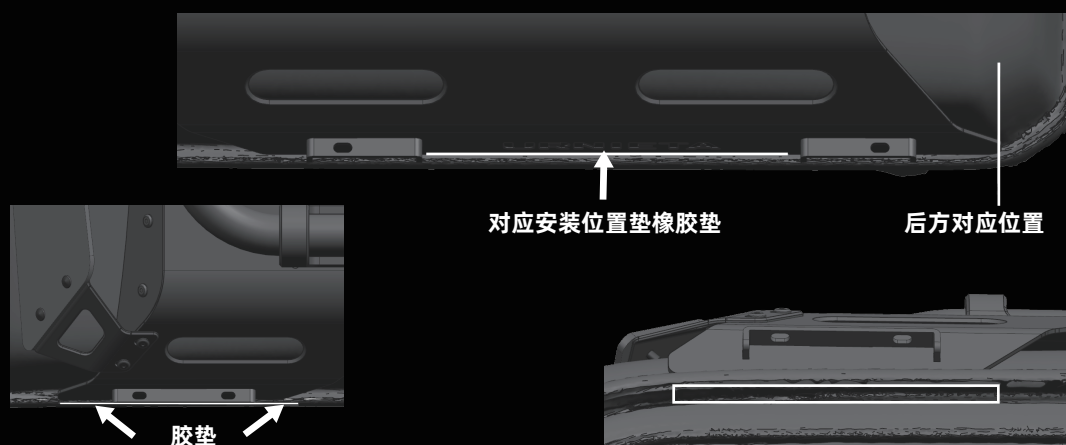

安装车顶平台（注意：车顶平台与车辆接触位置请垫胶垫）  
INSTALL THE ROOF PLATFORM (NOTE: PLEASE PLACE RUBBER PADS WHERE THE ROOF PLATFORM CONTACTS THE VEHICLE)

# 03.

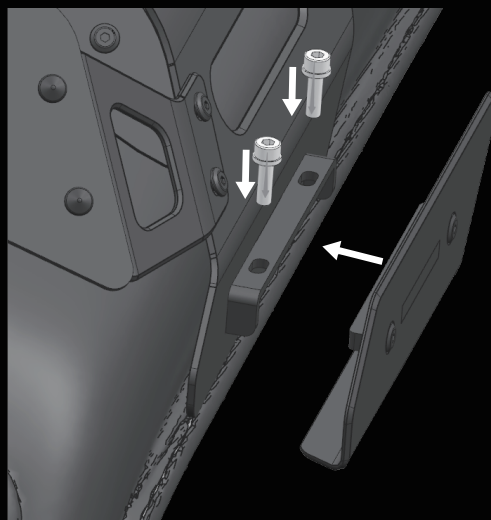

## 安装支架

(注意: 使用对应安装位的胶垫和M6内六角杯头螺丝、垫片安装)

MOUNTING BRACKET

(NOTE: USE THE RUBBER PADS AND M6 HEXAGON SOCKET HEAD SCREWS AND WASHERS CORRESPONDING TO THE MOUNTING POSITION FOR INSTALLATION)

### ■ 产品参数

#### PRODUCT PARAMETERS

NAME	产品名称	LC76NS车顶平台
MATERIAL	材 质	铝镁合金/复合树脂
COLOUR	颜 色	武士黑
SPECIFICATIONS	产品规格	2243MM*1411MM*189MM(76)

### ■ 出厂配置

#### FACTORY CONFIGURATION

名称	平台总成	扰流板
		拓展带