


INSTALLATION INSTRUCTION
TOYOTA LC 250NS D-pillar handle

丰田LC 250
TOYOTA LC 250




01.

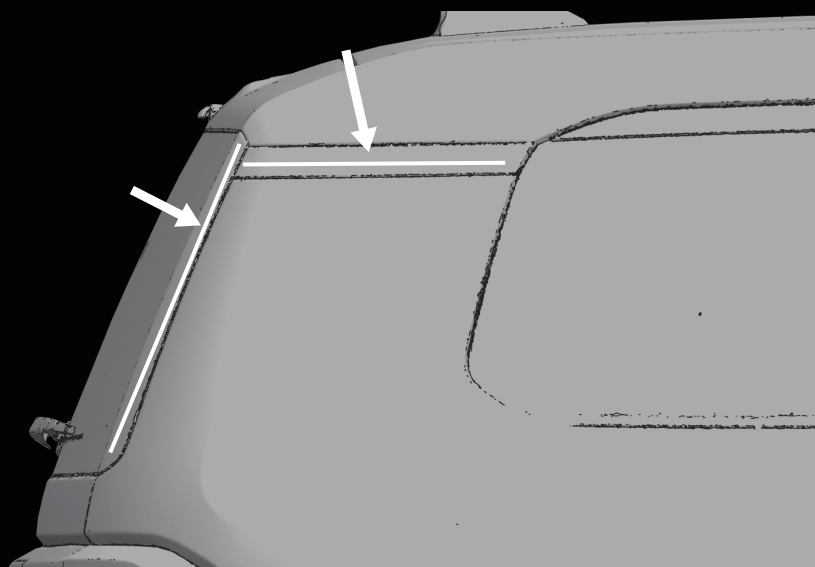


拆除D柱外饰板
REMOVE THE D-PILLAR EXTERIOR TRIM

02.

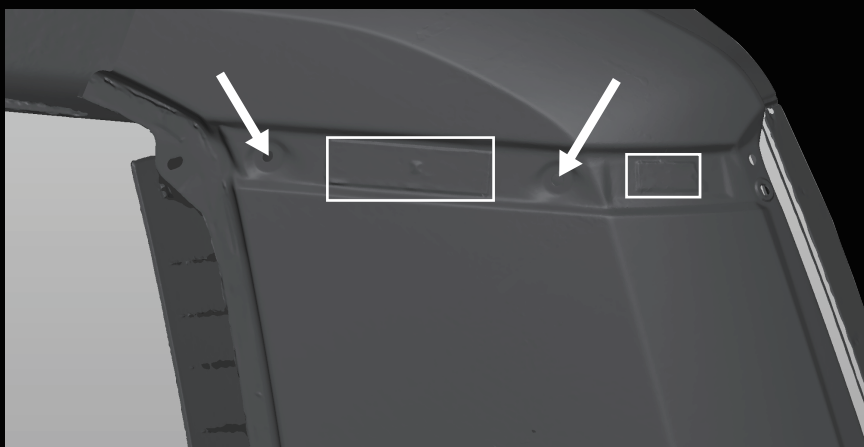

对底边原车胶条进行除胶处理，并在图示孔用8.9钻头扩孔处理
REMOVE THE GLUE FROM THE ORIGINAL RUBBER STRIP ON THE BOTTOM EDGE AND EXPAND THE HOLE SHOWN IN THE FIGURE WITH A 8.9 DRILL BIT

03.

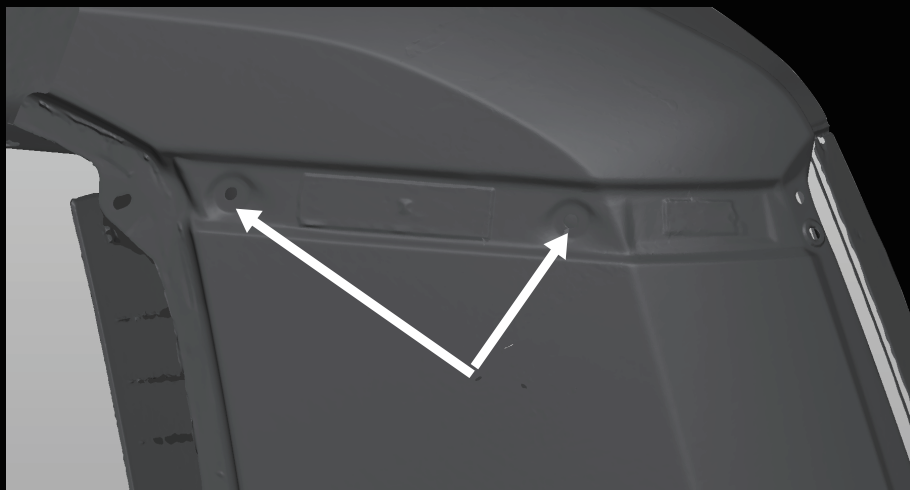

对扩完的孔使用拉铆枪拉铆
USE A RIVET GUN TO RIVET THE EXPANDED HOLE

04.



安装D柱拉手(注意: 对底面与3M胶刷助粘剂在用M6*20内六角杯头螺丝锁紧)
INSTALL THE D-PILLAR HANDLE (NOTE: APPLY 3M ADHESIVE TO THE BOTTOM SURFACE AND TIGHTEN WITH M6*20 HEXAGON SOCKET HEAD SCREW)

■ 产品参数

PRODUCT PARAMETERS

NAME	产品名称	LC250NS-D柱拉手
MATERIAL	材 质	铝镁合金
COLOUR	颜 色	武士黑
SPECIFICATIONS	产品规格	371MM*42MM*109MM

■ 出厂配置

FACTORY CONFIGURATION

名称	拉手总成X2
----	--------